



FRENCH-OWNED COMPANY
WITH MANUFACTURING OPERATIONS IN CHINA

CATALOGUE

2025

Sino Concept is a French-owned and operated manufacturing group specialising in the production of steel, rubber, and plastic products.



 www.sinoconcept.co.uk

 contact@sinoconcept.co.uk

CONTENTS

Durable & Reliable



ROAD & TRAFFIC SAFETY DEVICES

SPEED CUSHIONS	04
LANE DIVIDERS	06
GLASS ROAD STUDS	06
ALUMINIUM ROAD STUDS	08
RUBBER-BASED ROAD STUDS	08
PLASTIC ROAD STUDS	08
STEEL BASED ROAD STUDS	08



CAR PARK SAFETY MANAGEMENT

SPEED BUMPS	10
ONE-PART SPEED BUMPS	12
SPEED HUMPS	12
WHEEL STOPS	13
HGV WHEEL STOPS	15
FLOOR BIKE RACKS	16
PARKING SPACE LOCK BARRIERS	18
LAMP POST PROTECTOR HOOPS	18
POLE AND COLUMN PROTECTORS	18
HOOPED PERIMETER BARRIERS	18



TRAFFIC CONTROL EQUIPMENT

TRAFFIC SAFETY CONES	20
METAL ROADWORKS BEACONS (K5B)	22
PLASTIC ROADWORKS BEACONS (K5C)	22
SCANDINAVIAN DELINEATOR PANELS	23
BALLAST SANDBAGS	23
EXPANDABLE STEEL BARRIERS	24
MANHOLE SAFETY BARRIERS	24



EVENT MANAGEMENT

CABLE RAMPS	26
MODULAR CABLE RAMPS	28
CABLE PROTECTOR RAMPS - 1200MM	30
HOSE PROTECTOR RAMPS	30
DROP OVERS	31
FLOOR CABLE COVERS	31
CROWD CONTROL BARRIERS	32
CROWD BARRIER STILLAGE	32

Road and Traffic Safety Devices

SPEED CUSHIONS	04
LANE DIVIDERS	06
GLASS ROAD STUDS	06
ALUMINIUM ROAD STUDS	08
RUBBER-BASED ROAD STUDS	08
PLASTIC ROAD STUDS	08
STEEL BASED ROAD STUDS	08

■ SPEED CUSHIONS



Durable and Eco-Friendly: Speed cushions made from premium recycled material, a mix of plastic and rubber, REACH compliant, UV-resistant, and weatherproof. Provides long-lasting protection, ideal for mid-sized parking areas.

✂️ ACCESSORIES:



Anti-Slip UV-Resistant Heavy-Duty

SKIDPROOF SURFACE
Non-slip surface for better grip.

AVAILABLE IN BLACK
Other colours on request.



REFLECTIVE FILMS
Embedded thick thermoplastic reflective road marking films to enhance visibility and safety.

COMPANY NAME OR LOGO
Can be moulded-in for easy identification.

HEAVY-DUTY HARDWARE
Premium-quality screws and plastic anchors – rust-proof and highly durable.

CUSTOM-MADE PACKING
Designed for international shipping, easy storage and delivery.

TYPE	DIMENSIONS (L*W*H)
4 Parts (2 right corners + 2 left corners)	2000 x 1800 x 65 mm (6.56' x 5.9' x 2.56')
6 Parts (2 right corners + 2 left corners + 2 middle parts)	3000 x 1800 x 65 mm (9.84' x 5.9' x 2.56')

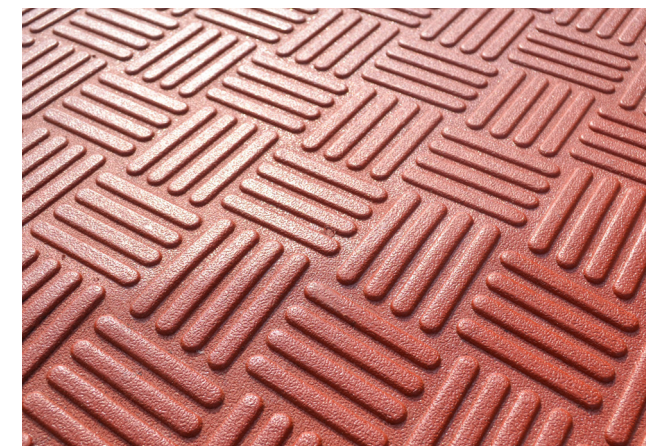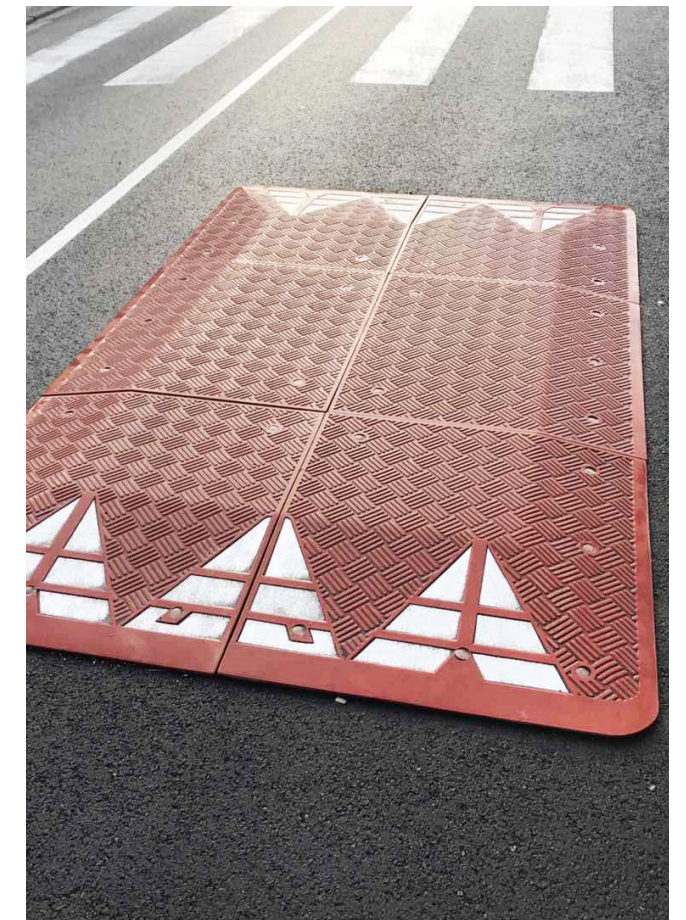

LANE DIVIDERS



ACCESSORIES:



M12 Coach Screws, PE Plastic Anchors



PE Plastic caps



PLASTIC-RUBBER COMPOSITE

Cost-effective, UV-resistant, and very sturdy.



REFLECTIVE FILMS

Embedded thick thermoplastic reflective road marking films to enhance visibility and safety.



360° SOLID GLASS ROAD STUD (PREMIUM VERSION)

Increases visibility and safety at night.



AVAILABLE IN BLACK

Other colours on request.

TYPE	DIMENSIONS (L*W*H)	GLASS ROAD STUDS
Eco (without road stud)	1000 x 130 x 50 mm (3.3' x 5" x 2")	/
Premium (with road stud)	1000 x 130 x 50 mm (3.3' x 5" x 2")	Ø 50 mm (Ø1.97")

GLASS ROAD STUDS



TEMPERED GLASS CONSTRUCTION

Durable, long-lasting, with excellent performance after installation.



AVAILABLE IN VARIOUS COLOURS

Different colours to improve visibility in various environments.



360° VISIBILITY

Optimal visibility in low light conditions.




EN 1463 STANDARD COMPLIANT

Ensures high performance and durability according to EN 1463 standards.

TYPE	DIFFERENCE	DIMENSIONS (D*H)
Glass road stud - Small	Recycled rubber for the base	Ø 50 x 55 mm (2" x 2.2")
Glass road stud - Large	Only tempered glass	Ø 100 x 50 mm (4" x 2")



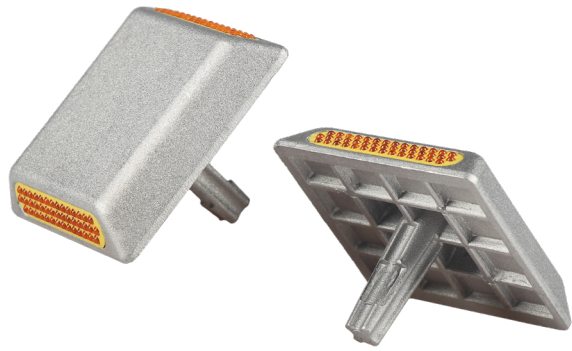

ALUMINIUM ROAD STUDS

TYPE	DIMENSIONS (L*W*H)	MAX. LOAD
Heavy-duty	100 x 100 x 75 mm (4" x 4" x 3")	20 to 30 tons
Standard	100 x 100 x 75 mm (4" x 4" x 3")	10 tons



PLASTIC ROAD STUDS

DIMENSIONS (L*W*H)	MAX. LOAD
100 x 100 x 20 mm (4" x 4" x 0.8")	5 to 10 tons




RUBBER-BASED ROAD STUDS

DIMENSIONS (H*W*T)
155 x 95 x 62 mm (6.1" x 3.7" x 2.4")



STEEL BASED ROAD STUDS

TYPE	DIMENSIONS (L*W*H)
One side	110 x 50 x 70 mm (4.3" x 2" x 2.8")
Two sides	120 x 50 x 70 mm (4.7" x 2" x 2.8")

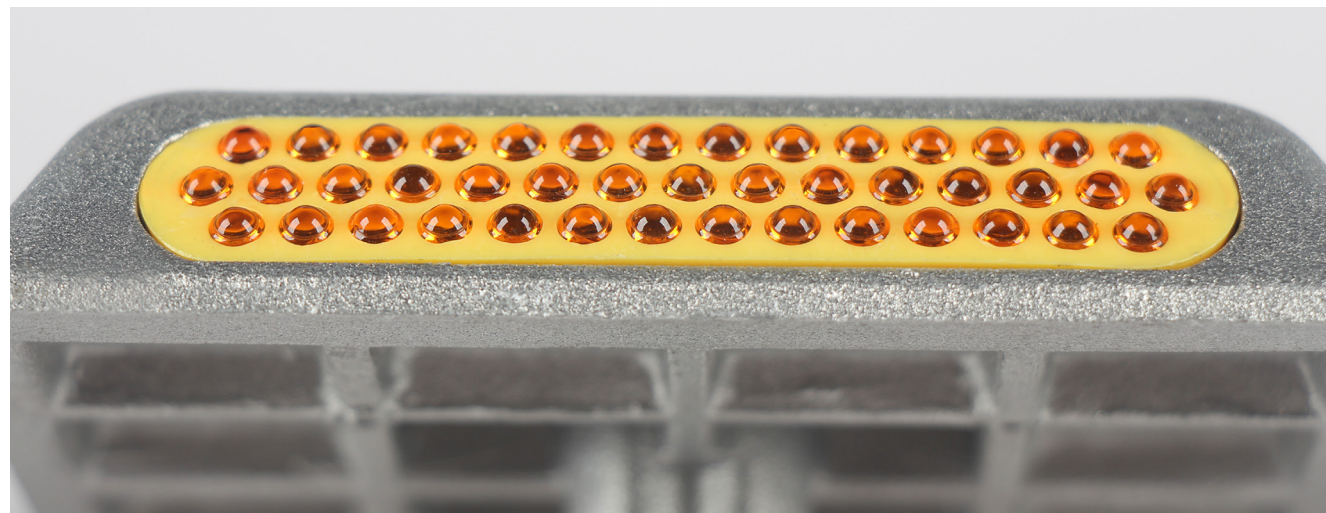

Car Park Safety Management

- SPEED BUMPS 10
- ONE-PART SPEED BUMPS..... 12
- SPEED HUMPS 12
- WHEEL STOPS 13
- HGV WHEEL STOPS 15
- FLOOR BIKE RACKS..... 16
- PARKING SPACE LOCK BARRIERS 18
- LAMP POST PROTECTOR HOOPS 18
- POLE AND COLUMN PROTECTORS 18
- HOOPED PERIMETER BARRIERS 18

■ SPEED BUMPS



1. Standard version: Suitable for light vehicles and light utility vehicles under normal usage conditions. Maximum Load Capacity: 20 tons per axle.

2. Heavy-duty version: Suitable for light utility vehicles, with enhanced durability. Maximum Load Capacity: 25 tons per axle.

✂ PARTS & ACCESSORIES:



HEIGHT	PART	DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER
50 mm	Middle part	500 x 350 x 50 mm (20' x 14" x 2")	Ø 30 mm (Ø 1.18")
50 mm	End cap	250 x 350 x 50 mm (10" x 14" x 2")	Ø 30 mm (Ø 1.18")
70 mm	Middle part	500 x 400 x 70 mm (20' x 16" x 2.76")	Ø 35 mm (Ø 1.38")
70 mm	End cap	250 x 400 x 70 mm (10" x 16" x 2.76")	Ø 35 mm (Ø 1.38")



YELLOW MOULDED-IN COVER
Built into the speed bump to stay bright with no peeling or fading. Yellow stays yellow.

INTERLOCKING SYSTEM
Male and female connectors to prevent movement and allow quick installation.

2-IN-1 PRODUCT
Built-in channels for cable protection.

180° GLASS BEAD REFLECTORS
Highly visible in all conditions.





ONE-PART SPEED BUMPS




20 km/h




PARTS / ACCESSORIES:

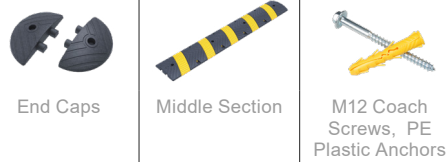


SKIDPROOF SURFACE
Non-slip surface for better grip.



180° GLASS BEAD REFLECTORS
Highly visible in all conditions.



CONVENIENT STORAGE
Screws and anchors stored underneath for easy setup.




2-IN-1 PRODUCT
Built-in channels for cable protection.

TYPE	DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER
Middle part	1830 x 300 x 50 mm (6' x 12" x 2")	Ø 30 mm (Ø 1.18")
End cap	150 x 300 x 50 mm (6" x 12" x 2")	/

SPEED HUMPS




PARTS / ACCESSORIES:



SKIDPROOF SURFACE
Non-slip surface for better grip.



INTERLOCKING SYSTEM
Male and female connectors to prevent movement and allow quick installation.



2-IN-1 PRODUCT
Built-in channels for cable protection.

HEIGHT	MIDDLE SECTION DIMENSIONS (L*W*H)	END CAP DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER
30 mm (1.2")	500 x 600 x 30 mm (20" x 24" x 1.18")	250 x 600 x 30 mm (10" x 24" x 1.18")	/
50 mm (2")	500 x 600 x 50 mm (20" x 24" x 1.97")	250 x 600 x 50 mm (10" x 24" x 1.97")	2 x Ø 30 mm (Ø 1.18")
50 mm (2")	500 x 900 x 50 mm (20" x 35" x 1.97")	250 x 900 x 50 mm (10" x 35" x 1.97")	2 x Ø 30 mm (Ø 1.18")
70 mm (3")	500 x 900 x 70 mm (20" x 35" x 2.76")	250 x 900 x 70 mm (10" x 35" x 2.76")	2 x Ø 45 mm (Ø 1.77")
70 mm (3")	500 x 1200 x 70 mm (20" x 47" x 2.76")	250 x 1200 x 70 mm (10" x 47" x 2.76")	2 x Ø 45 mm (Ø 1.77")

WHEEL STOPS




ACCESSORIES:




Durable and Eco-Friendly: Car Park Wheel Stop made from premium recycled material, a mix of plastic and rubber, REACH compliant, UV-resistant, weatherproof, and free from unpleasant odours, ensuring long-lasting protection and reducing costs.

TYPE	DIMENSIONS (L*W*H)	REFLECTIVE FILM COLOURS
550 mm (2')	550 x 150 x 100 mm (2' x 6" x 4")	Yellow, white
900 mm (3')	900 x 150 x 100 mm (3' x 6" x 4")	Yellow, white
1220 mm (4')	1220 x 150 x 100 mm (4' x 6" x 4")	Yellow, white
1830 mm (6')	1830 x 150 x 100 mm (6' x 6" x 4")	Yellow, white




HEAVY-DUTY STRUCTURE
Thick walls and V-shaped ribs for maximum strength in tough conditions.



REFLECTIVE FILMS
Embedded thick thermoplastic reflective road marking films to enhance visibility and safety.



CONVENIENT STORAGE
Screws, anchors, and caps stored underneath for easy setup.

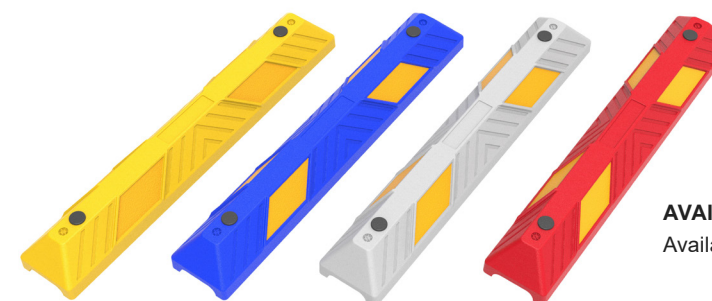

AVAILABLE IN MORE COLOURS
Available colours: Yellow, blue, white, red, etc.



■ HGV WHEEL STOPS



Durable and Eco-Friendly: HGV wheel stop made from premium recycled material, a mix of plastic and rubber, REACH compliant, UV-resistant, weatherproof, and free from unpleasant odours, ensuring long-lasting protection and reducing costs.

✂️ **ACCESSORIES:**



M12 Coach
Screws, PE
Plastic Anchors



MATERIAL

Plastic-Rubber composite


DIMENSIONS (L*W*H)

1000 x 300 x 150 mm (39.4" x 11.8" x 5.9")



CONVENIENT STORAGE

Screws and anchors stored underneath for easy setup.


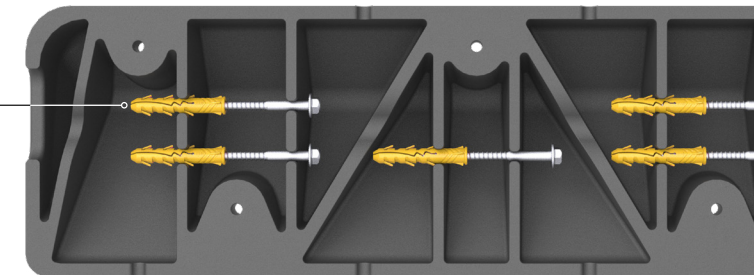


INTEGRATED HIGH-VISIBILITY MARKING

Mould-in yellow marking for enhanced visibility and safety.


EFFICIENT IMPACT DISTRIBUTION

Full-surface contact for stability and even impact distribution for durability.

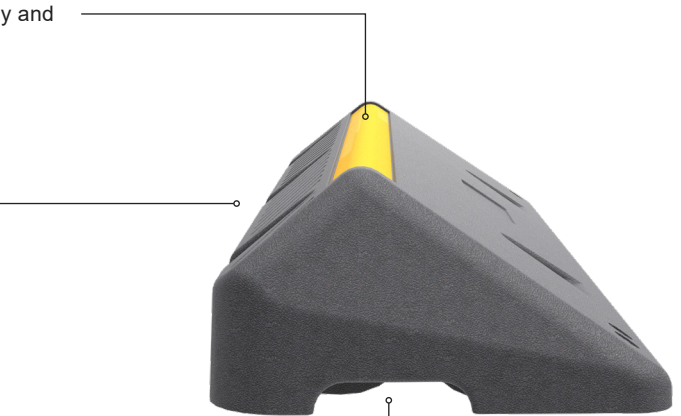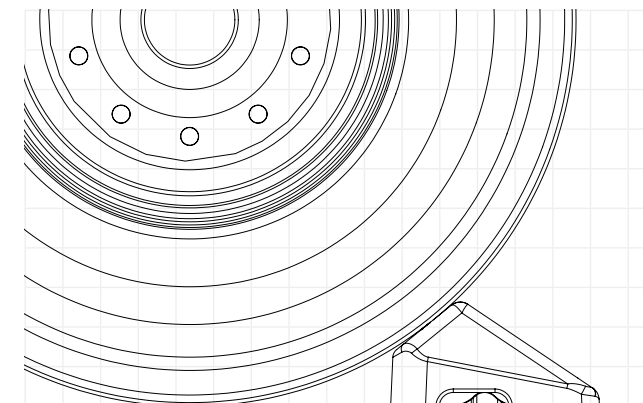

CONVENIENT HANDLES
Easy to carry and to install.

FLOOR BIKE RACKS

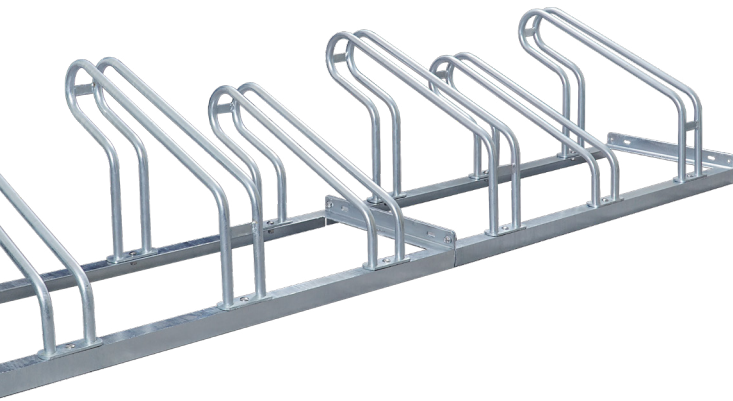

HOT-DIP GALVANISED FINISH (MINIMUM 80 MICRONS)
Highly corrosion-resistant treatment that prevents rust.



SPACE-SAVING
Low and high hoops save space for bike parking.



LOCKABLE OPTIONS
Securely lock bike frames for extra safety.



CUSTOM-MADE PACKING
Designed for international shipping, easy storage and delivery.

OPTIONAL ACCESSORIES:







Ground Spike



Flange Locknuts



90° Angle

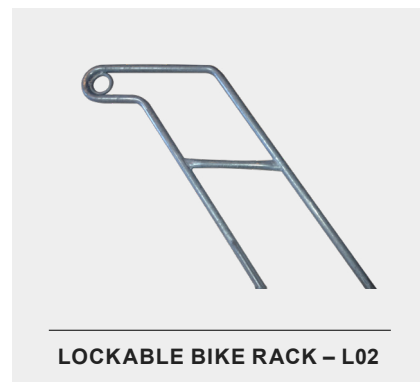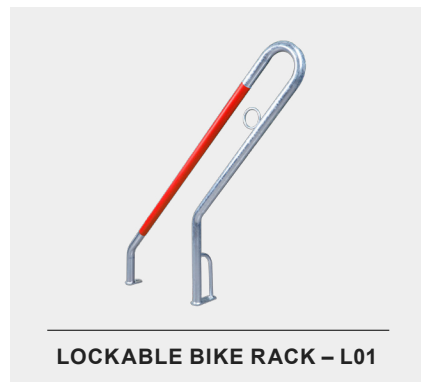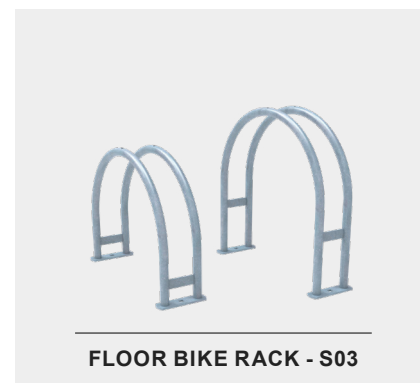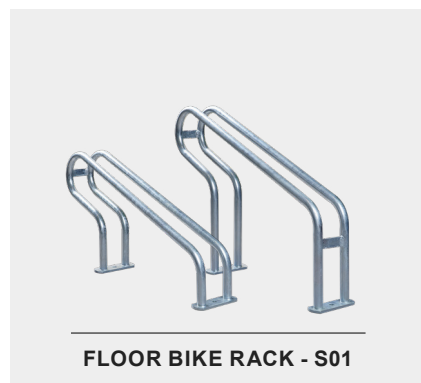

TYPE	TUBE DIAMETER	MAX. TYRE WIDTH
S01, S02, S03	Ø 18 mm (Ø 0.7")	45 mm (1.8")

TYPE	AVAILABLE LENGTHS	WIDTH
BASE	700 mm (27.6"), 1000 mm (39.4"), 1050 mm (41.3"), 1100 mm (43.3"), etc	395 mm (15.6")






■ PARKING SPACE LOCK BARRIERS

Material: Mild steel tube.

Surface Treatment: Fully hot-dipped galvanised (after welding).



DIMENSIONS (W*H)

740 x 400 mm (29.1" x 15.7")



■ POLE AND COLUMN PROTECTORS

Material: Mild steel tube.

Surface Treatment: Fully hot-dipped galvanised (after welding).

Available Finishing Treatment: Anti-UV powder coating.



TYPE DIMENSIONS (L*W*H)

Surface mounted	600 x 600 x 500 mm (23.6" x 23.6" x 19.7")
Embedded	600 x 600 x 680 mm (23.6" x 23.6" x 26.8")



■ LAMP POST PROTECTOR HOOPS

Material: Mild steel tube.


Surface Treatment: Fully hot-dipped galvanised (after welding).

Available Finishing Treatment: Anti-UV powder coating.



TYPE DIMENSIONS (H*W)

Surface mounted	690 x 560 mm (27.2" x 22")
Embedded	870 x 560 mm (34.3" x 22")

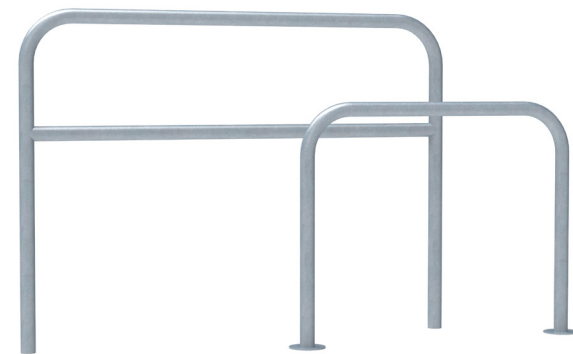

■ HOOPED PERIMETER BARRIERS

Material: Mild steel tube / Pre hot-dip galvanised steel tube.

Crossbar Option: With crossbar / Without crossbar.

Surface Treatment: Fully hot-dipped galvanised (after welding).

Available Finishing Treatment: Anti-UV powder coating.

TYPE	LENGTHS	HEIGHT
Embedded	1000, 1500, 2000 mm (39.4", 59", 79")	1300 mm (51.2")

TYPE	LENGTHS	HEIGHT
Surface mounted	1000, 1500, 2000 mm (39.4", 59", 79")	1000 mm (39.4")

Traffic Control Equipment

TRAFFIC SAFETY CONES.....	20
METAL ROADWORKS BEACONS (K5B).....	22
PLASTIC ROADWORKS BEACONS (K5C)	22
SCANDINAVIAN DELINEATOR PANELS.....	23
BALLAST SANDBAGS.....	23
EXPANDABLE STEEL BARRIERS.....	24
MANHOLE SAFETY BARRIERS	24

TRAFFIC SAFETY CONES



MAXI GRIP HANDLE

Handle with groove and textured grip for easy, efficient use, even with gloves.



FILM PROTECTION


Reflective films are embedded with a 1 mm recess to prevent tearing.




UNIQUE STACKING SYSTEM

Cone trunks stack apart, preventing sticking and protecting reflective films.

TYPE	HEIGHT	BASE DIMENSIONS	REFLECTIVE SHEETING HEIGHT	WEIGHT
300 mm	300 mm (11.8")	215 x 215 mm (8.5" x 8.5")	100 mm (3.9") x 1	0.5 kg (1.1 lbs)
500 mm	500 mm (19.7")	275 x 275 mm (10.8" x 10.8")	100 mm (3.9") x 2	1.1 kg (2.4 lbs)
500 mm (weighted)	500 mm (19.7")	275 x 275 mm (10.8" x 10.8")	100 mm (3.9") x 2	1.8 kg (4 lbs)
750 mm	750 mm (29.5")	350 x 350 mm (13.8" x 13.8")	150 mm (5.9") x 2	2 kg (4.4 lbs)
750 mm (weighted 1)	750 mm (29.5")	350 x 350 mm (13.8" x 13.8")	150 mm (5.9") x 2	3.2 kg (7.0 lbs)
750 mm (weighted 2)	750 mm (29.5")	365 x 365 mm (14.4" x 14.4")	150 mm (5.9") x 2	4.2 kg (9.3 lbs)
750 mm (highway)	750 mm (29.5")	400 x 400 mm (15.7" x 15.7")	150 mm (5.9") x 2	4.2 kg (9.3 lbs)

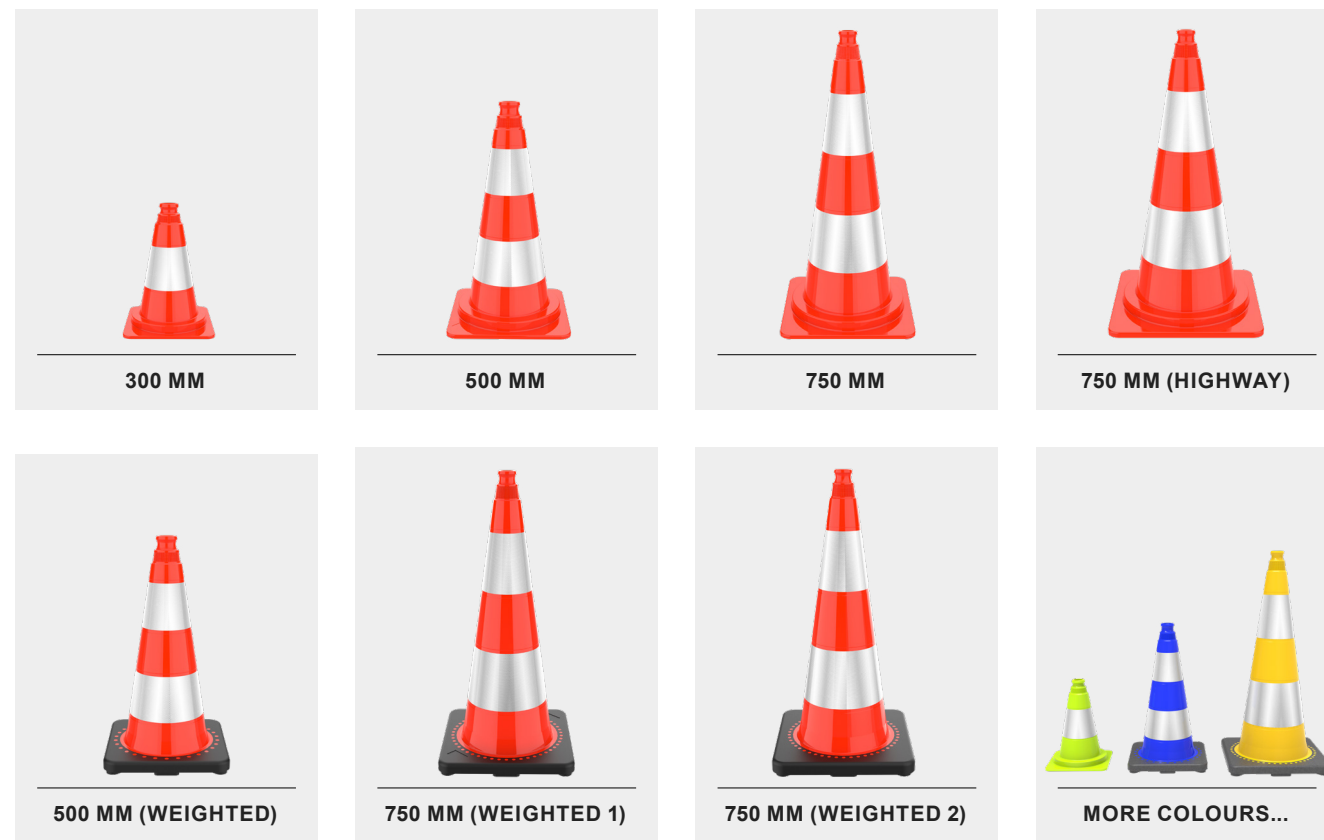

METAL ROADWORKS BEACONS (K5B)

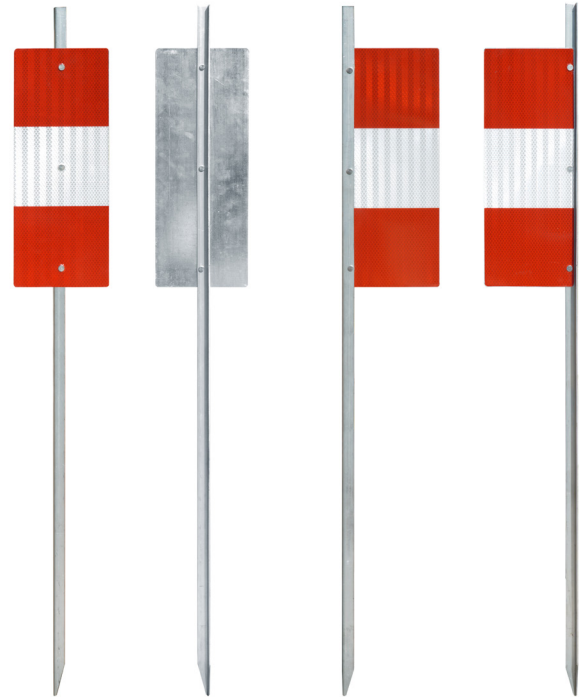

- HIGHLY REFLECTIVE SHEETINGS**
Engineering-Grade (RA1)
High-Intensity Prismatic Grade (RA3).
- GALVANISED STEEL ANGLE & PLATE**
Ensures durability and corrosion resistance.
- REINFORCED STEEL RIVETS**
Ensures optimal durability, even under intensive use.
- ANGLED END**
Allows fast and easy installation, even on hard ground.

HEIGHT	GALVANISED STEEL ANGLE	GALVANISED STEEL PLATE
1100 mm (43")	20 x 15 mm (0.78" x 0.59")	150 x 375 mm (5.9" x 14.7")

PLASTIC ROADWORKS BEACONS (K5C)



- CONVENIENT HANDLE**
Easy to carry and install.
- HIGHLY REFLECTIVE SHEETINGS**
Engineering-Grade (RA1)
High-Intensity Prismatic Grade (RA3).
- DIRECTIONAL ARROW**
Helps you to position the beacon in the correct direction.
- COMPANY NAME OR LOGO**
Can be moulded-in for easy identification.

MATERIAL	DIMENSIONS (H*W*T)	REFLECTIVE SHEETING DIMENSIONS
Virgin high-density polyethylene (HDPE), white	1300 x 280 x 60 mm (51" x 11" x 2.4")	1000 x 250 mm (39" x 10")
Recycled high-density polyethylene (HDPE), grey	1300 x 280 x 60 mm (51" x 11" x 2.4")	1000 x 250 mm (39" x 10")

SCANDINAVIAN DELINEATOR PANELS



- HIGHLY REFLECTIVE SHEETINGS**
Fluo Engineering-Grade (RA1)
Fluo High-Intensity Prismatic Grade (RA3).
- DIRECTIONAL ARROW**
Helps you to position the beacon in the correct direction.
- CONVENIENT HANDLE**
Easy to carry and install.
- SAVE PACKING STORAGE**
Stackable design saves space, prevents slipping, and keeps beacons organised.

MATERIAL	DIMENSIONS (H*W*T)	REFLECTIVE SHEETING DIMENSIONS
Polypropylene (PP)	1000 x 225 x 22 mm (39.5" x 8.85" x 0.87")	800 x 190 mm (31.5" x 7.5")


BALLAST SANDBAGS




- DOUBLE-STITCHED SEAMS**
Strong stitching for long-lasting use.
- HEAVY-DUTY ROPE**
Easy to carry and handle.
- 8 ALUMINIUM EYELETS**
Corrosion-resistant aluminium for a longer lifespan.
- COMPANY NAME OR LOGO**
Screen-printed logo for easy identification.

MATERIAL	DIMENSIONS (L*W)	DENSITY	CAPACITY
PVC-coated fabric	600 x 400mm (24" x 15")	640 g/m ²	15 kg (33 lbs) – delivered empty

EXPANDABLE STEEL BARRIERS

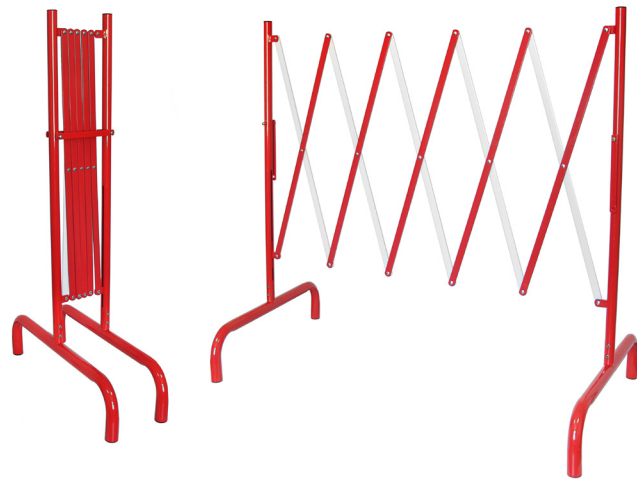

PACKAGE:



SEAMLESS, STRONG WELD
Strong welding to prevent cracks.



REINFORCED STEEL RIVETS
Ensures optimal durability, even under intensive use.




INTERLOCKING SYSTEM
For easy transportation and storage.



ANTI-SLIP FEET
Improves stability and ensures safety when installed.

HEIGHT	LENGTH	FINISHING TREATMENT
1000 mm (39")	Folded: 200 mm (8"), Unfolded: 2.85 m (9')	Anti-UV powder coating

MANHOLE SAFETY BARRIERS

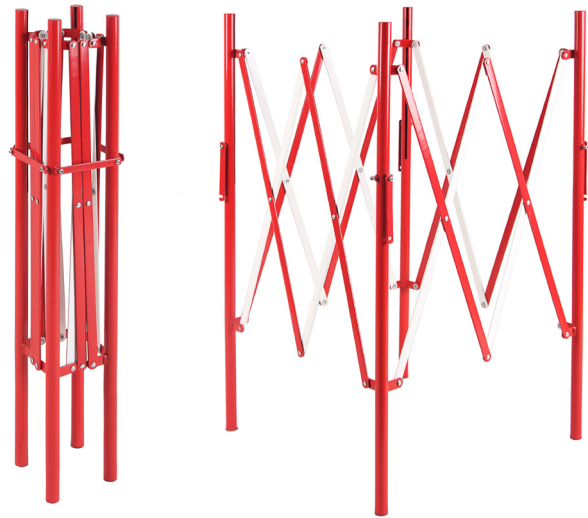

PACKAGE:



SEAMLESS, STRONG WELD
Strong welding to prevent cracks.



REINFORCED STEEL RIVETS
Ensures optimal durability, even under intensive use.



INTERLOCKING SYSTEM
For easy transportation and storage.



ANTI-SLIP FEET
Improves stability and ensures safety when installed.

HEIGHT	LENGTH & WIDTH	FINISHING TREATMENT
1000 mm (39")	Folded: 150 x 150 mm (6" x 6"), Unfolded: 1.5 x 1.5 m (4.9' x 4.9')	Anti-UV powder coating

Event Management

- CABLE RAMPS 26
- MODULAR CABLE RAMPS 28
- CABLE PROTECTOR RAMPS - 1200MM 30
- HOSE PROTECTOR RAMPS..... 30
- DROP OVERS 31
- FLOOR CABLE COVERS 31
- CROWD CONTROL BARRIERS..... 32
- CROWD BARRIER STILLAGE..... 32


■ CABLE RAMPS

Material of the base:

- 1. Standard version:** Plastic-Rubber composite as a more economical option.
- 2. Heavy-duty version:** Vulcanised rubber for flexibility and durability.

Both are REACH compliant, odourless, and built to last.


45° CORNER SECTIONS:

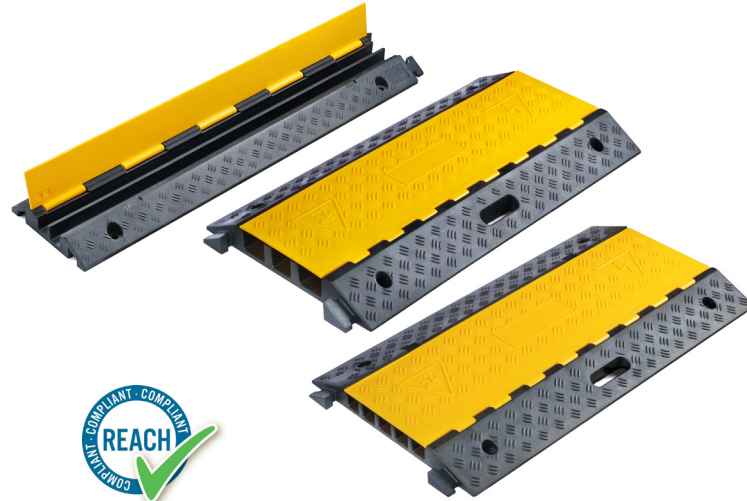

TYPE	DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)
2 Channels	990 x 240 x 45 mm (39" x 9.5" x 1.8")	30 x 32 mm (1.18" x 1.26")
3 Channels	900 x 500 x 70 mm (35.5" x 20" x 2.75")	65 x 50 mm (2.56" x 1.97") x 2, 56 x 50 mm (2.2" x 1.97")
5 Channels	900 x 500 x 50 mm (35.5" x 20" x 2")	38 x 32 mm (1.5" x 1.26")



THICK YELLOW LID
UV-stabilised PE with a non-slip surface to reduce tripping risks.





REINFORCED STRUCTURE
Premium material to reinforce key stress points like hinges and connectors.




45° LEFT TURN / RIGHT TURN (2, 3 AND 5 CHANNELS)
Helps create right or left turns, keeping walking spaces safe.



INTERLOCKING SYSTEM
Easy to install and use, with no risk of disconnecting during operation.

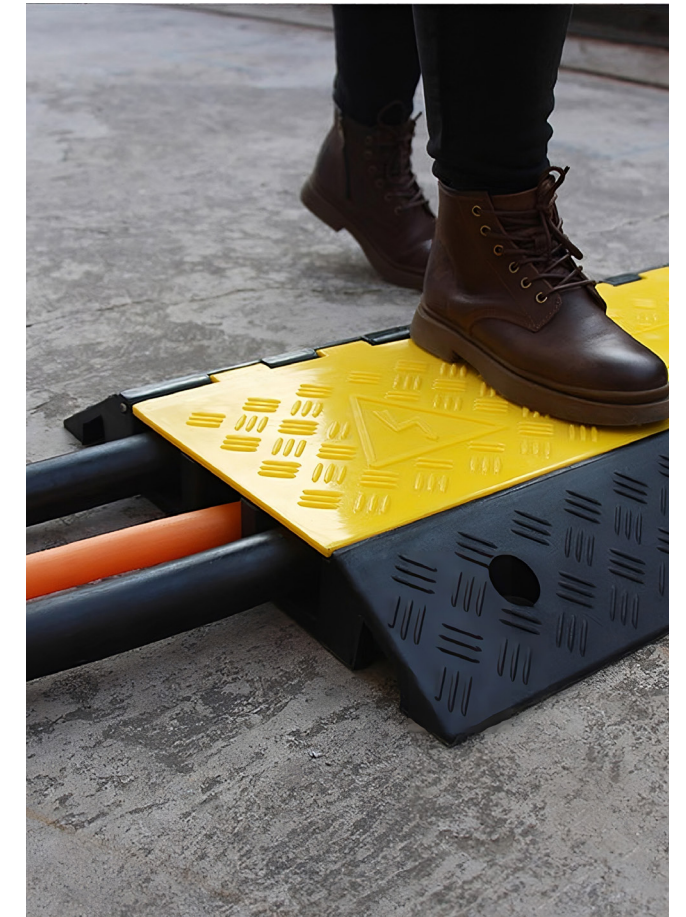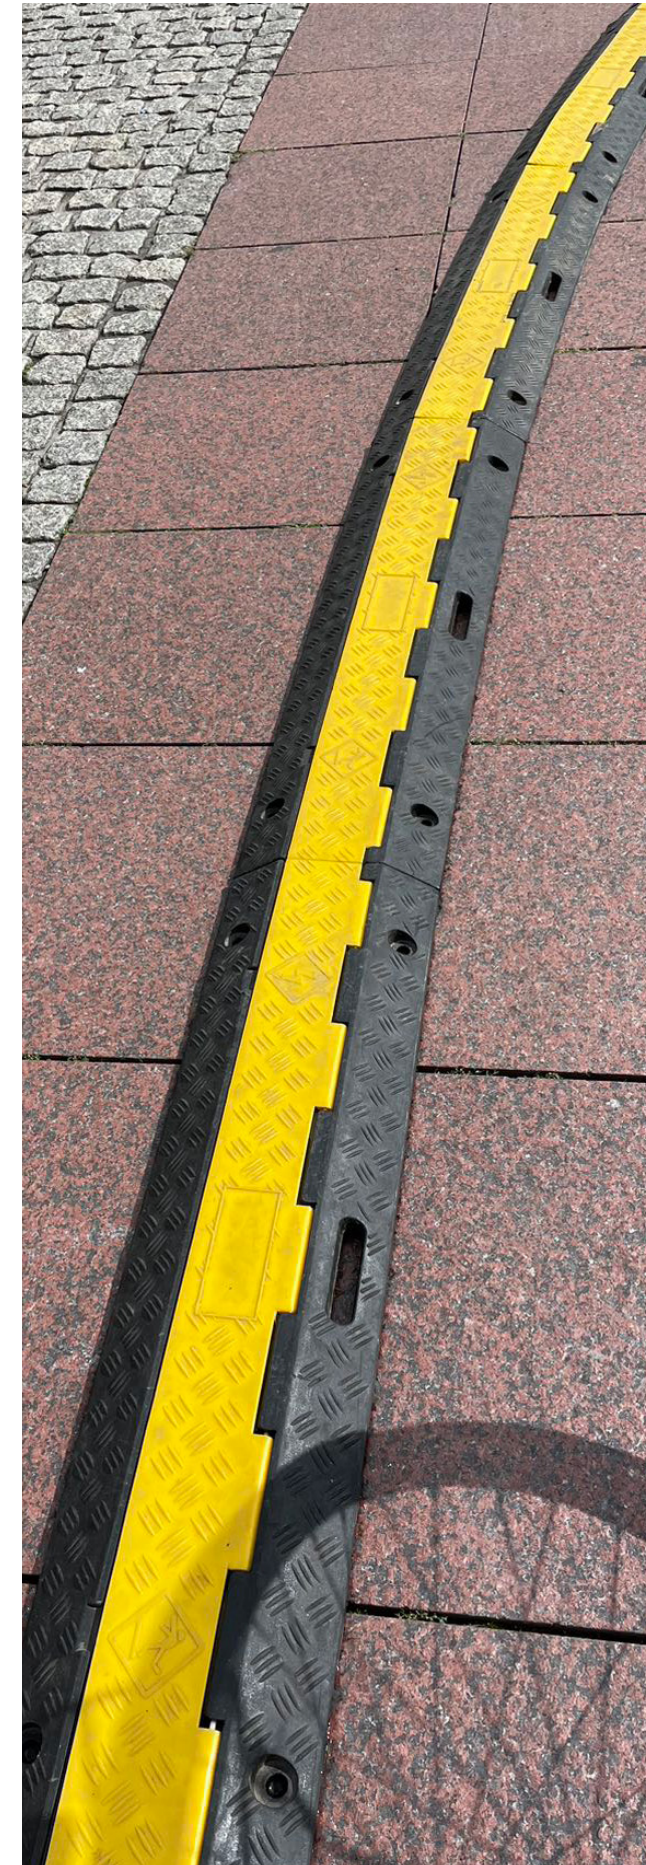

MODULAR CABLE RAMPS

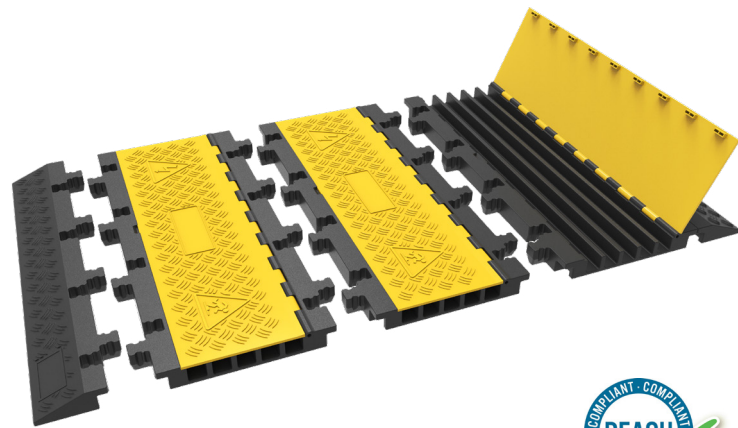

Material:

- 1. Base & Ramps:** Vulcanised rubber for flexibility and durability.
- 2. Cover:** UV-resistant polyethylene cover to endure extreme weather conditions and sunlight exposure.

REACH compliant, odourless, and built to last.

COMPATIBLE PRODUCT / ACCESSORIES:




5 Channels Cable ramp



Rubber H-Connectors

TYPE	DIMENSIONS (L*W*H , EXCLUDING CONNECTORS)	CHANNEL DIMENSIONS (W*H)
Middle section	895 x 370 x 50 mm (35.2" x 14.6" x 2")	37.5 x 35 mm (1.48" x 1.38")
Standard ramp	895 x 140 x 50 mm (35.2" x 5.5" x 2")	/
Gentle slope ramp	895 x 500 x 50 mm (35.2" x 19.7" x 2")	/
Half gentle slope ramp	447.5 x 500 x 50 mm (17.6" x 19.7" x 2")	/




SKIDPROOF SURFACE
Non-slip surface for better grip.





INTERLOCKING SYSTEM
Easy to install and use, with no risk of disconnecting during operation.



GENTLE SLOPE RAMP
5° incline for smooth and easy access for wheelchairs and pedestrians.

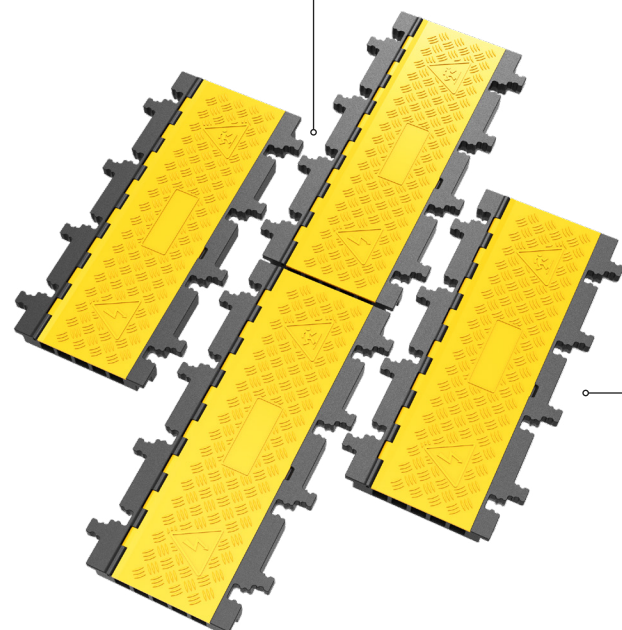

FLEXIBLE MODULAR DESIGN
The modular cable ramp allows for easy and flexible assembly to suit various needs.

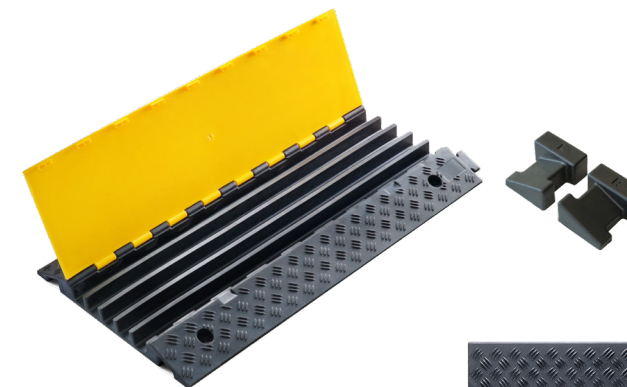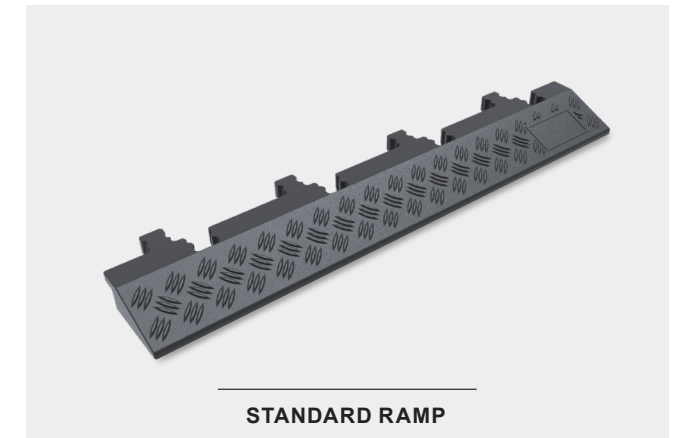

COMPATIBLE WITH 5-CHANNEL CABLE RAMP

The middle modular cable ramp seamlessly connects with our 5-channel cable ramps using H-Connectors, ensuring a secure and continuous cable protection system.



■ CABLE PROTECTOR RAMPS - 1200MM



SKIDPROOF SURFACE
Non-slip surface for better grip.



CABLE COVER BASE
Designed to receive two cables up to Ø 20 mm (Ø 0.8") and one cable up to Ø 40 mm (Ø 1.6").




COMPANY NAME OR LOGO
Can be moulded-in for easy identification.



CUSTOM-MADE PACKING
Designed for international shipping, easy storage and delivery.

DIMENSIONS (L*W*H)	MAX. CABLE DIAMETER
1200 x 200 x 60 mm (47" x 8" x 2.5")	1 x Ø 42 mm (Ø 1.65") and 2 x Ø 20 mm (Ø 0.8")

■ HOSE PROTECTOR RAMPS

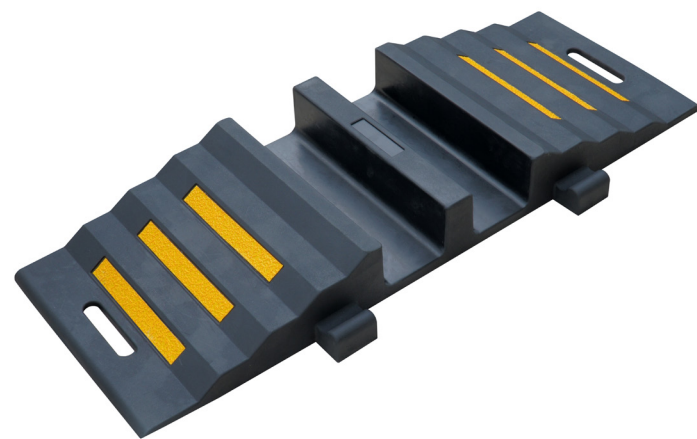

BUILT-IN HANDLE
Easy to transport and reduces fatigue, saving time during installation and storage.



REFLECTIVE FILMS
Embedded thermoplastic reflective road marking films to enhance visibility and safety.



INTERLOCKING SYSTEM
Easy to install and use, with no risk of disconnecting during operation.



CUSTOM-MADE PACKING
Designed for international shipping, easy storage and delivery.

DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)	MAX. WEIGHT CAPACITY
850 x 300 x 85 mm (33" x 12" x 3.3")	90 x 70 mm (3.54" x 2.76")	9,000 kg (20,000 lbs) per axle

■ DROP OVERS



SKIDPROOF SURFACE
Non-slip surface for better grip.



MADE OF THERMOPLASTIC POLYURETHANE
Flexible material that perfectly fits uneven floors.




INTERLOCKING SYSTEM
Easy to install and use, with no risk of disconnecting during operation.




ANTI-SLIP PADS
Improves grip on smooth surfaces.

TYPE	DIMENSIONS (L*W*H)	CHANNEL DIMENSIONS (W*H)
Small	914 x 135 x 22 mm (36" x 5.25" x 0.87")	40 x 14 mm (1.57" x 0.55")
Large	914 x 280 x 40 mm (36" x 11" x 1.57")	104 x 30 mm (4" x 1.25")


■ FLOOR CABLE COVERS



SKIDPROOF SURFACE
Non-slip surface for better grip.



1 CHANNEL - TOP SLIT
To install the cable from the top.




3 CHANNELS - TOP & BOTTOM SLIT
To install the cable from the top & bottom.



CUSTOM-MADE PACKING
Designed for international shipping, easy storage and delivery.

TYPE	DIMENSIONS	MAX. CABLE DIAMETER
1 Channel	10,000 x 100 x 30 mm (33' x 4" x 1.2")	Ø 20 mm (Ø 0.8")
3 Channels	4,000 x 160 x 50 mm (13' x 6" x 2")	1 x Ø 40 mm (Ø 1.6") and 2 x Ø 20 mm (Ø 0.8")

■ CROWD CONTROL BARRIERS

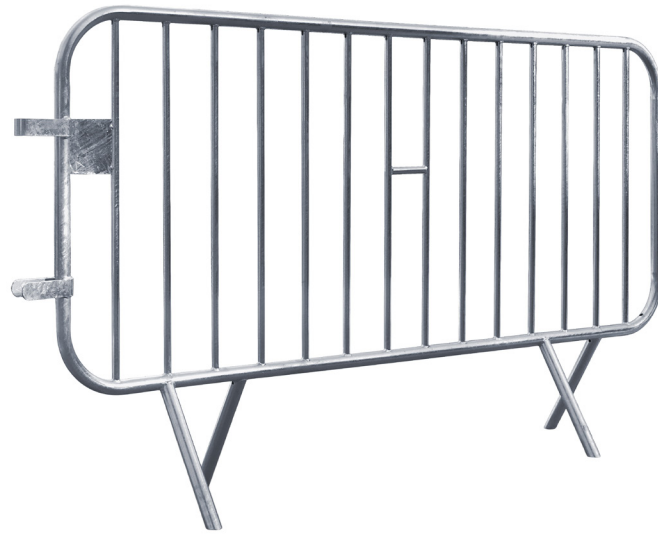

SEAMLESS, STRONG WELD
Strong welding to prevent cracks.



HOT-DIP GALVANISED FINISH (MINIMUM 80 MICRONS)
Highly corrosion-resistant treatment that prevents rust.



PATENTED HANDLE
Allows carrying two barriers at once (unique on the market).



REINFORCED INTERLOCKING SYSTEM
Extra-thick 5 mm connectors for strong and stable use.

TYPE	DIMENSIONS (L*H)	TUBE DIAMETERS
Crowd Barrier - 1 Metre	1000 x 1090 mm (39" x 43")	Frame: Ø 32 mm (Ø 1.3"), 6 Inner rails: Ø 16 mm (Ø 0.6")
Crowd Barrier - 2 Metres	2000 x 1090 mm (79" x 43")	Frame: Ø 32 mm (Ø 1.3"), 14 Inner rails: Ø 16 mm (Ø 0.6")



■ CROWD BARRIER STILLAGE




SEAMLESS, STRONG WELD
Strong welding to prevent cracks.



HOT-DIP GALVANISED FINISH (MINIMUM 80 MICRONS)
Highly corrosion-resistant treatment that prevents rust.



SINGLE LOCK SYSTEM
Simple and effective, prevents the loss of crowd control barriers.



STACKING SYSTEM
Stable stacking for easy management.

✂ APPLICABLE PRODUCTS:



DIMENSIONS (L*W*H)	CONTAINS
980 x 910 x 1200 mm (38.6" x 35.8" x 47.2")	20 Pieces of crowd barriers





FRENCH-OWNED COMPANY
WITH MANUFACTURING OPERATIONS IN CHINA

THANK YOU FOR YOUR INTEREST IN OUR PRODUCTS!

For more products and details, please visit our website:

<https://www.sinoconcept.co.uk>



MAIN OFFICE (CHINA):

27 Ping Xiang Road, Shibe District,
Shui Xiang Yuan,
Building 6, Unit 3, Door 102
266011 Qingdao, China

Phone number: 0086 532 8561 1600

WRITE US

contact@sinoconcept.co.uk